


Disegno per omologazione
Drawing for type-approval






Nota (*): vedere scheda informativa
Note (*): see information document

A	B	C	D
4250	2375	805 ÷ 2120	9270 ÷ 10585
4500	2625	805 ÷ 2120	9520 ÷ 10835
4750	2875	805 ÷ 2020	9770 ÷ 10985
5020	3145	805 ÷ 2020	10040 ÷ 11255
5600	3725	805 ÷ 1970	10620 ÷ 11785
5820	3945	805 ÷ 1920	10840 ÷ 11955
6200	4325	805 ÷ 1585	11220 ÷ 12000

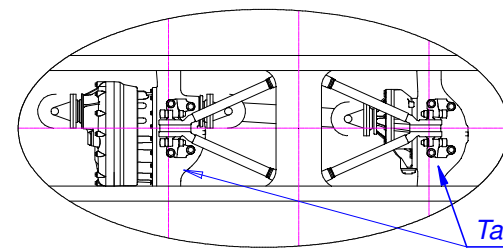


Tandem HR-TM

View A

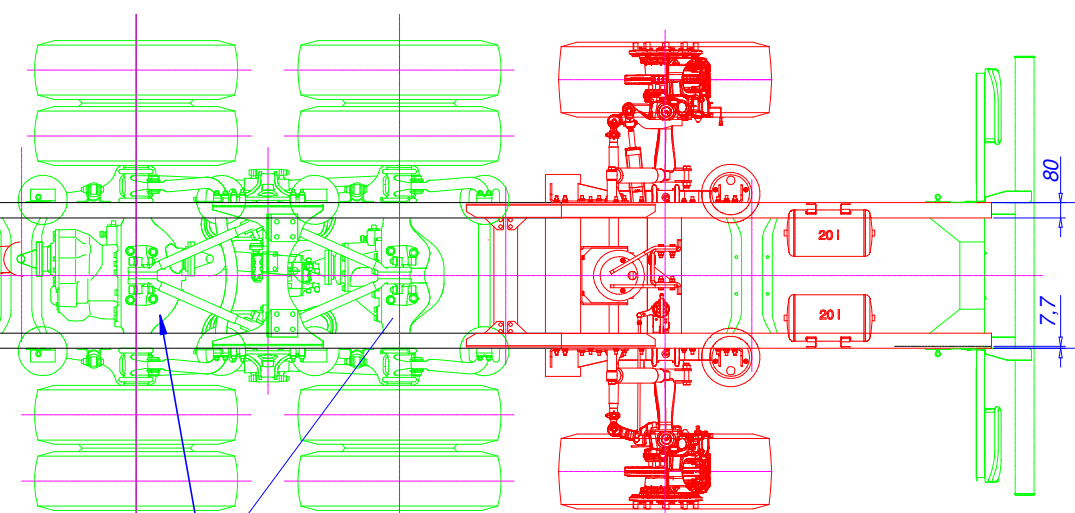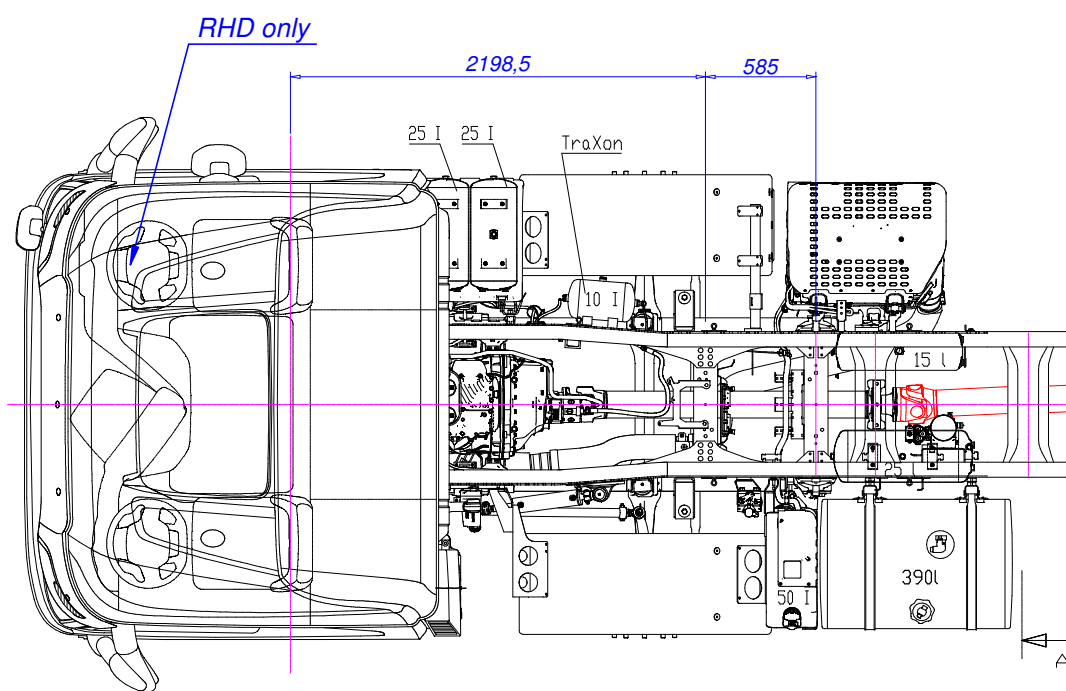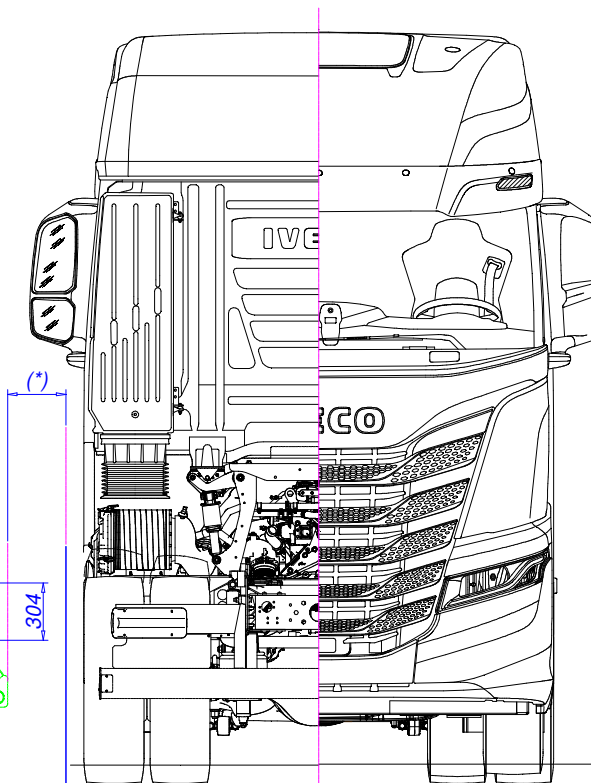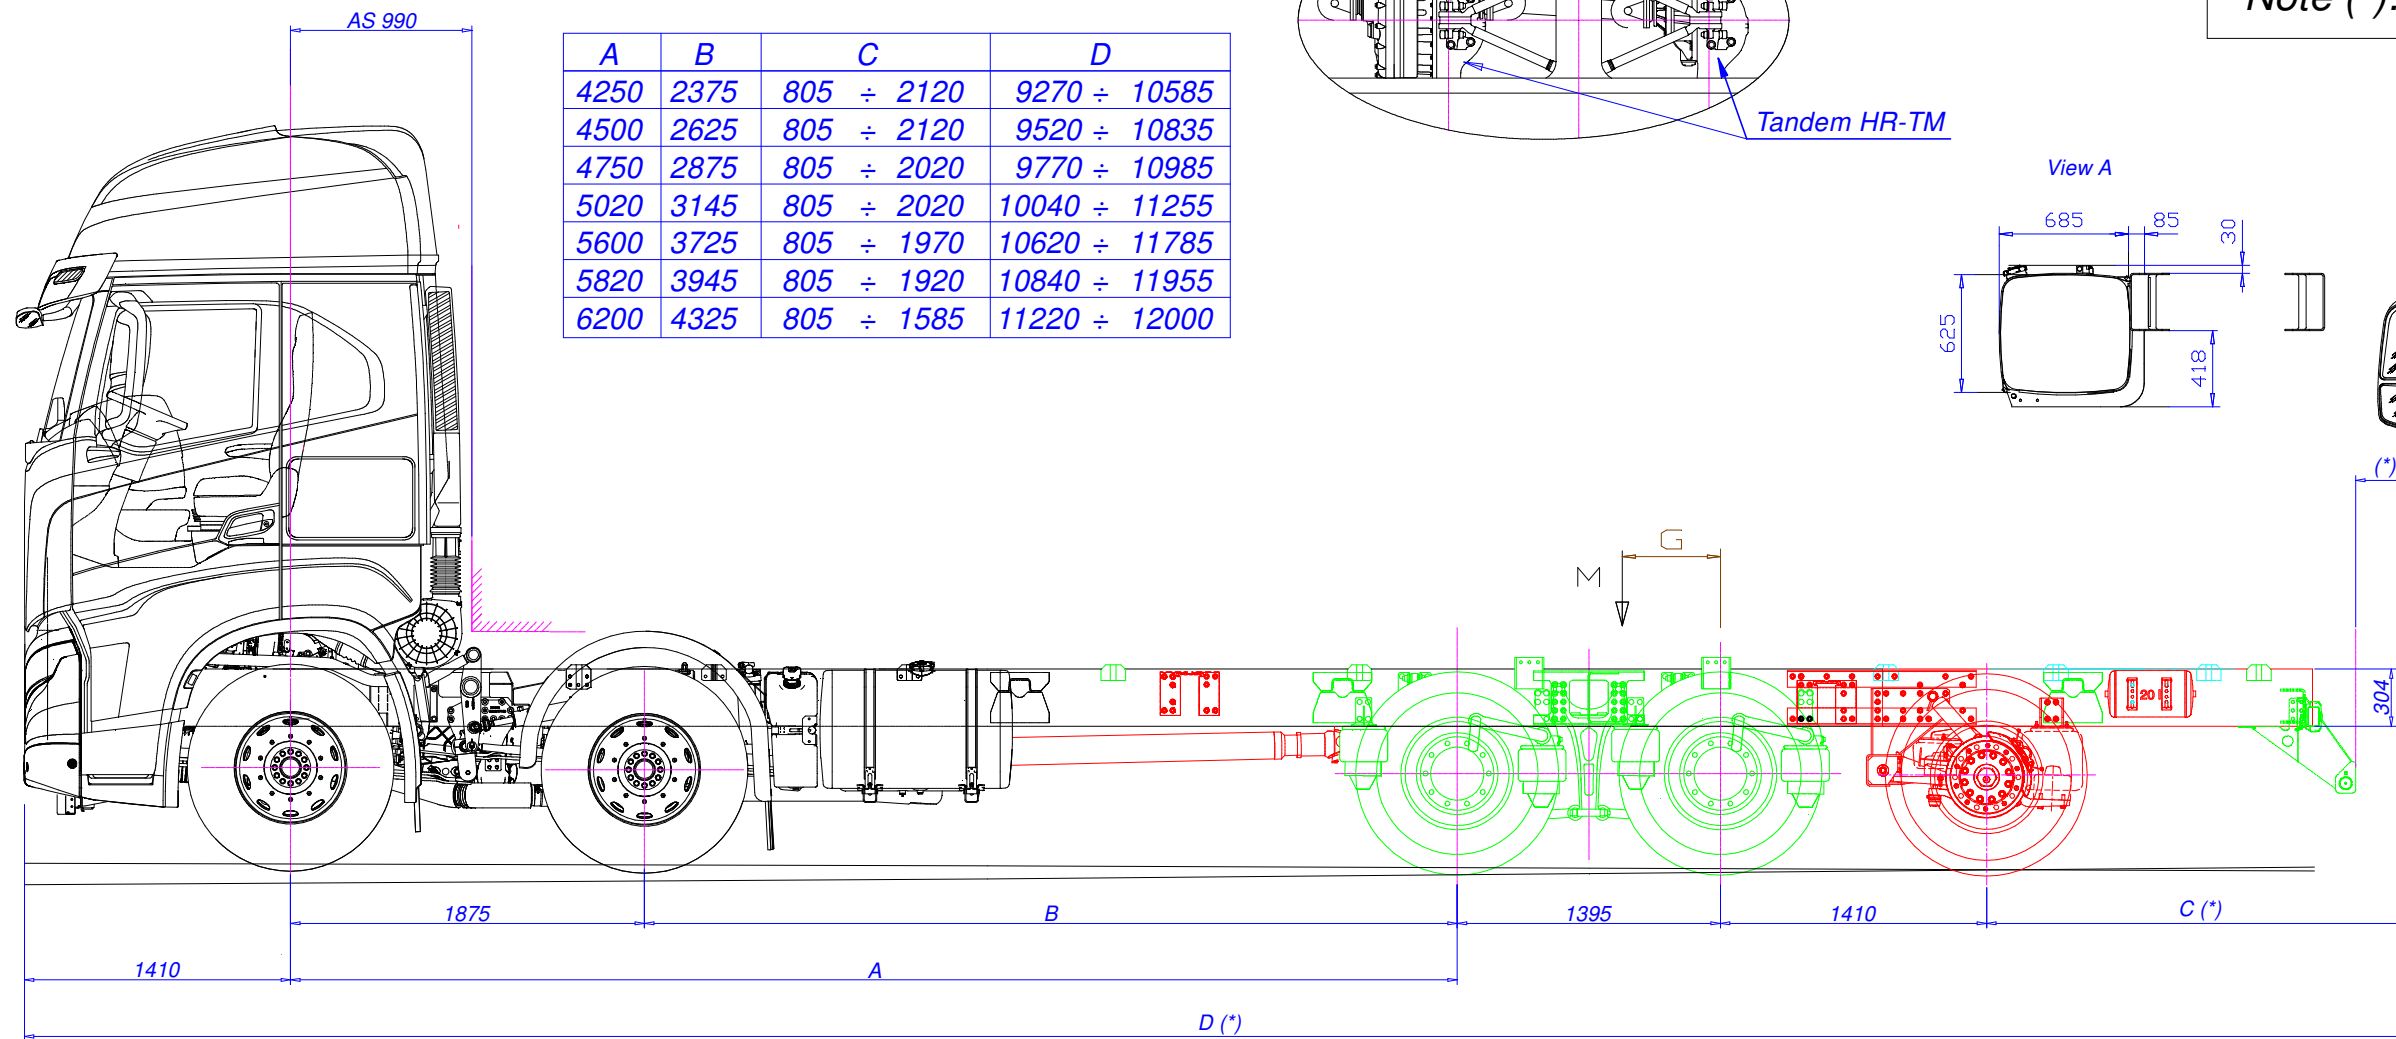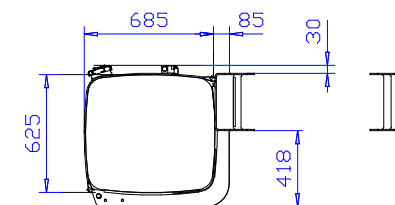

Tandem SR-T

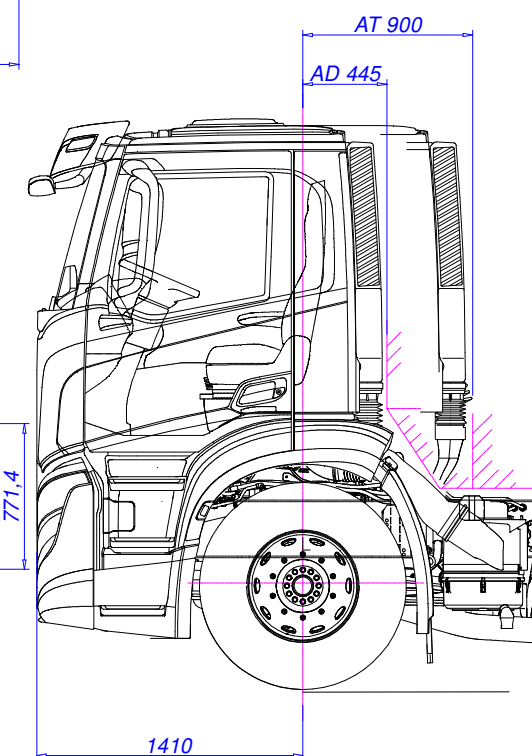

Applicazione 5° asse posteriore ed eventuale allungamento passo per traslazione a 6200 mm con adeguamento dello sbalzo posteriore.
5th rear axle application and eventually wheelbase extension for translation to 6200 mm with adjustment of the rear overhang.

Tightening tolerance - f004	ISO 2768 - ---- Tolerancing ISO 8015	Author P. MARTINI	Date 10/02/2020	Scale 1:20
All proprietary rights reserved by S.T. System Truck S.p.A. The reproduction, distribution and utilization of this document as well as the communication of its content to others, without express authorization from S.T. System Truck S.p.A. is prohibited (see ISO 1676:2016).				
Description IVECO MS34Y AD/AT/AS 350/360X, ..Z, ..HR ON+ 10x4				
APPLICAZIONE 5° ASSE POSTERIORE				
Code 55.01.00.0124	Drawing 55.01.00.0124	Sheet 1/1	Format A1	