


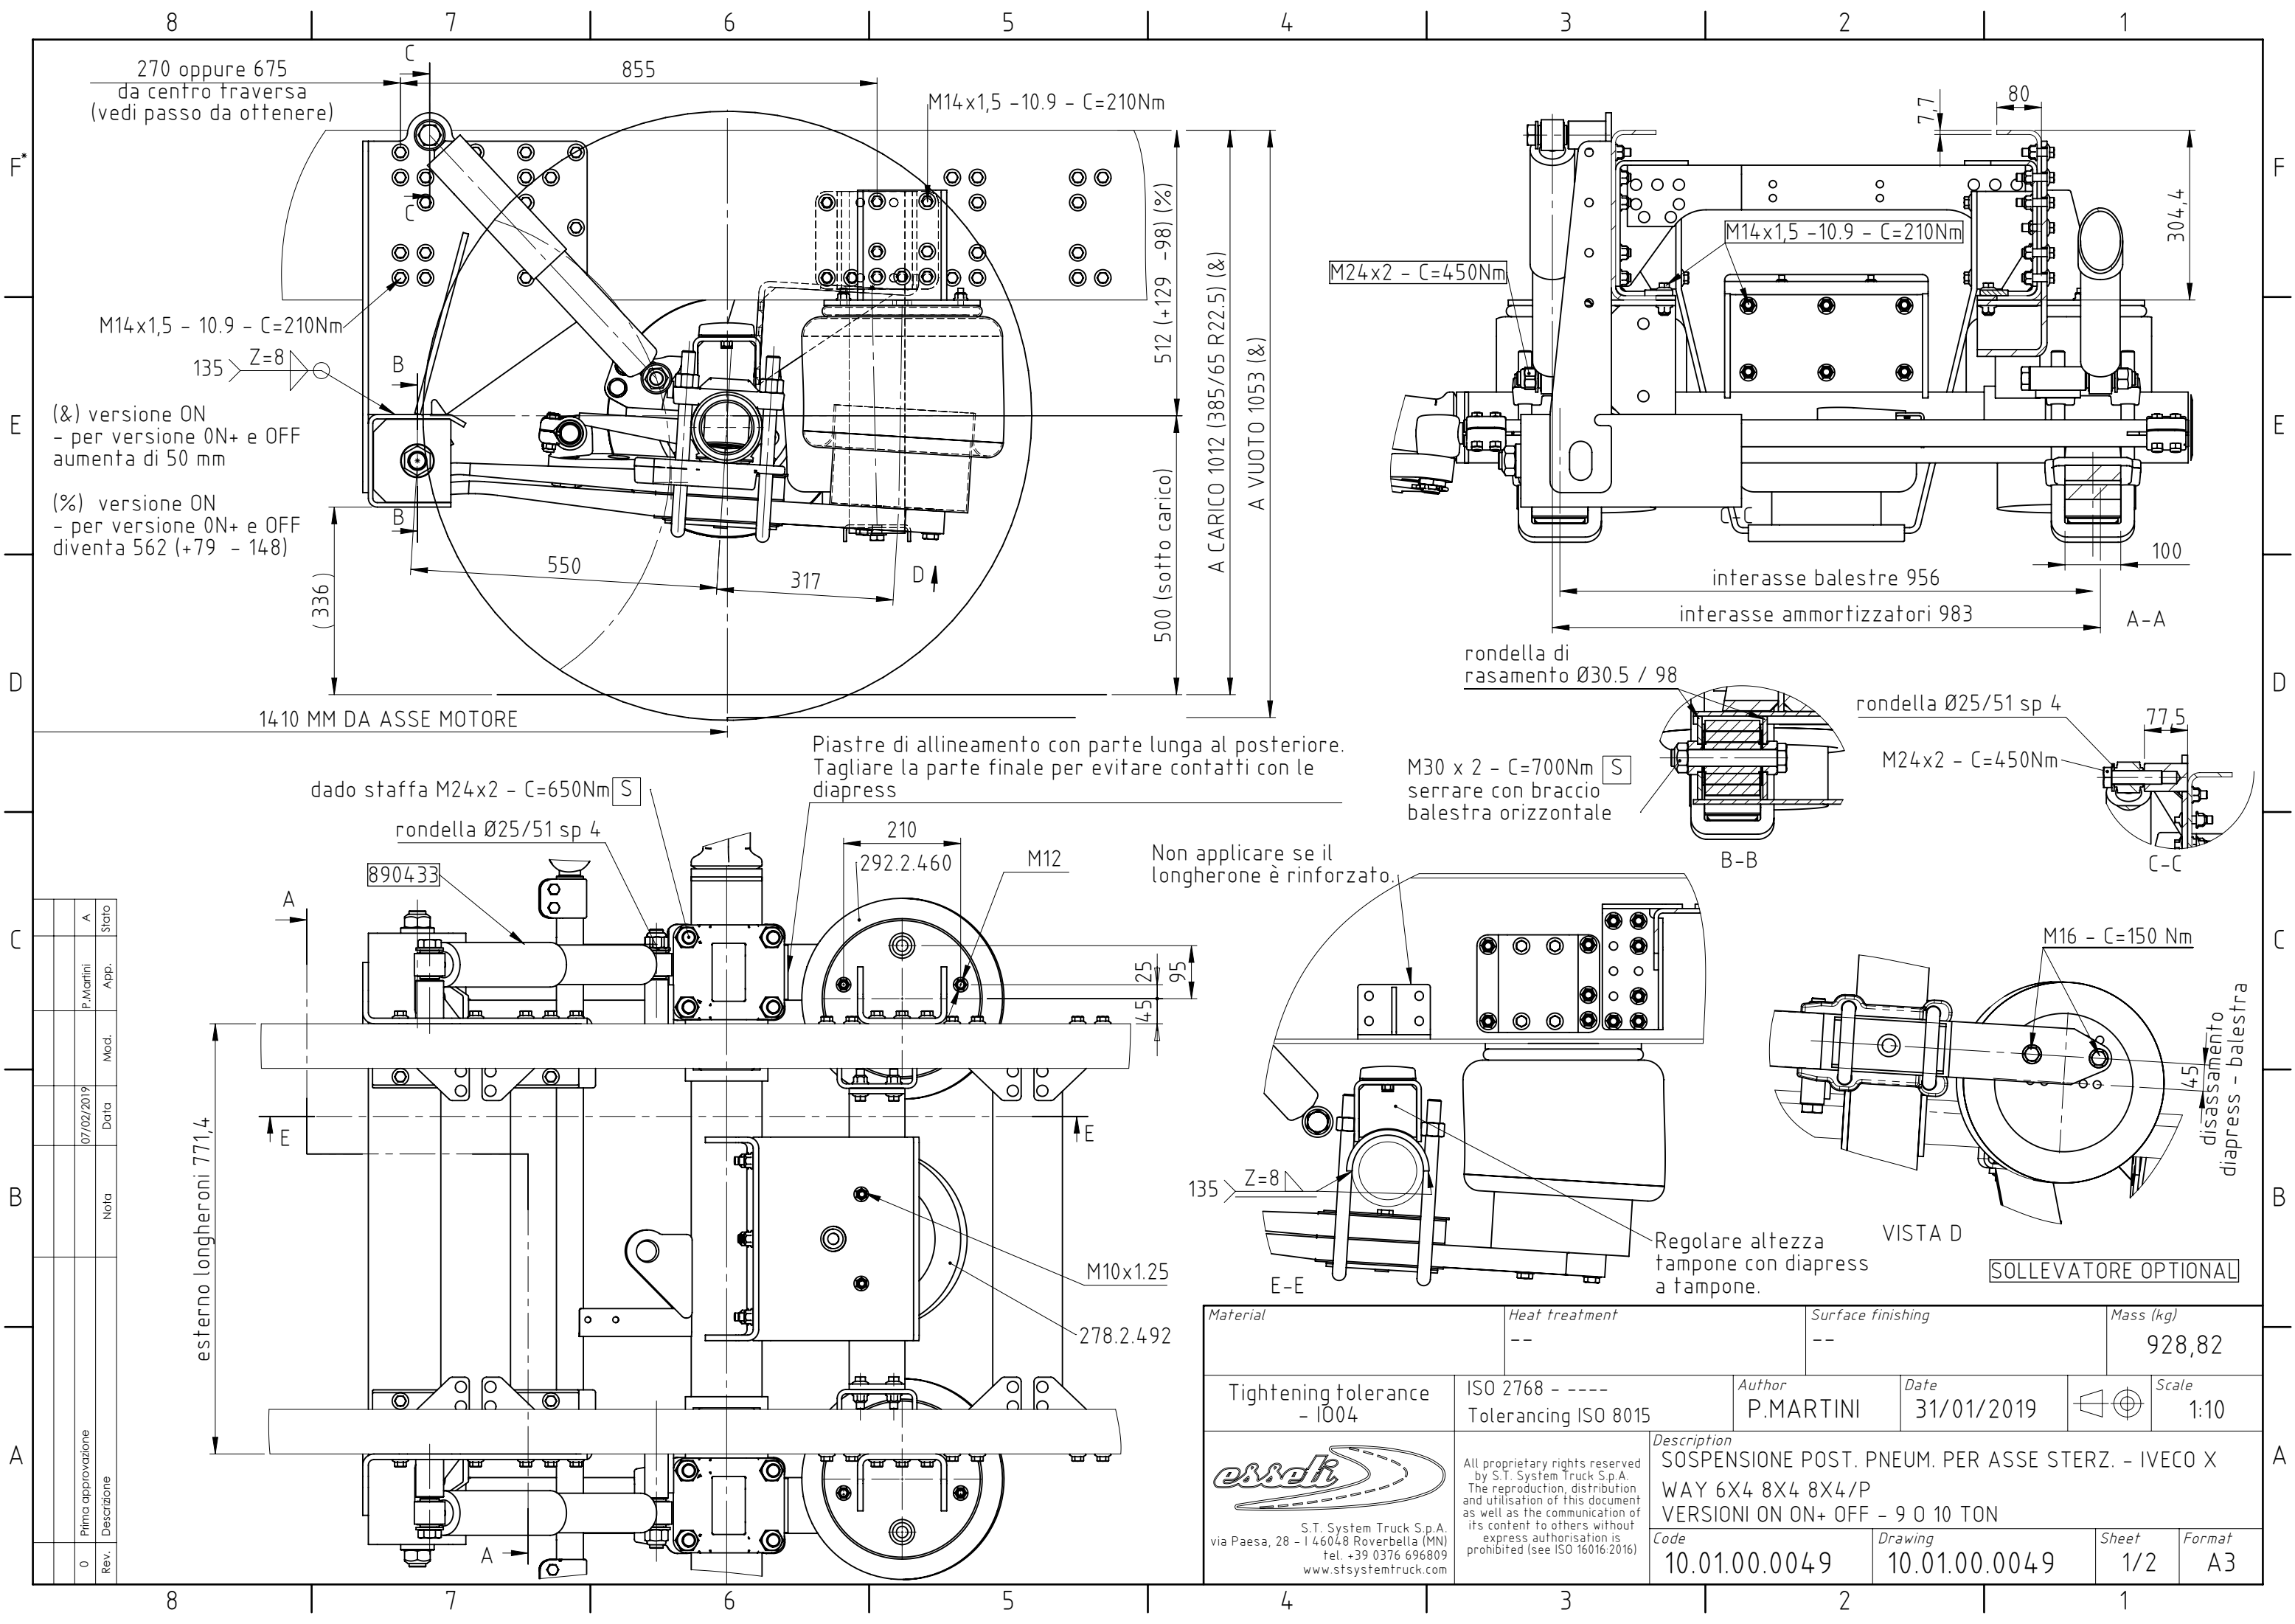

F*

E

D

C

B

A

F

E


D

C

B


A

Rev.	Descrizione	Nota	Data	Mod.	App.	Stato
0	Prima approvazione		07/02/2019		P.Martini	A

Material		Heat treatment		Surface finishing		Mass (kg)					
		--		--		928,82					
Tightening tolerance - I004		ISO 2768 - ---- Tolerancing ISO 8015		Author P.MARTINI		Date 31/01/2019				Scale 1:10	
 S.T. System Truck S.p.A. via Paesa, 28 - I 46048 Roverbella (MN) tel. +39 0376 696809 www.stsystemtruck.com		All proprietary rights reserved by S.T. System Truck S.p.A. The reproduction, distribution and utilisation of this document as well as the communication of its content to others without express authorisation is prohibited (see ISO 16016:2016)		Description SOSPENSIONE POST. PNEUM. PER ASSE STERZ. - IVECO X WAY 6X4 8X4 8X4/P VERSIONI ON ON+ OFF - 9 0 10 TON							
				Code 10.01.00.0049		Drawing 10.01.00.0049		Sheet 1/2		Format A3	

F
E
D
C
B
A

F
E
D
C
B
A

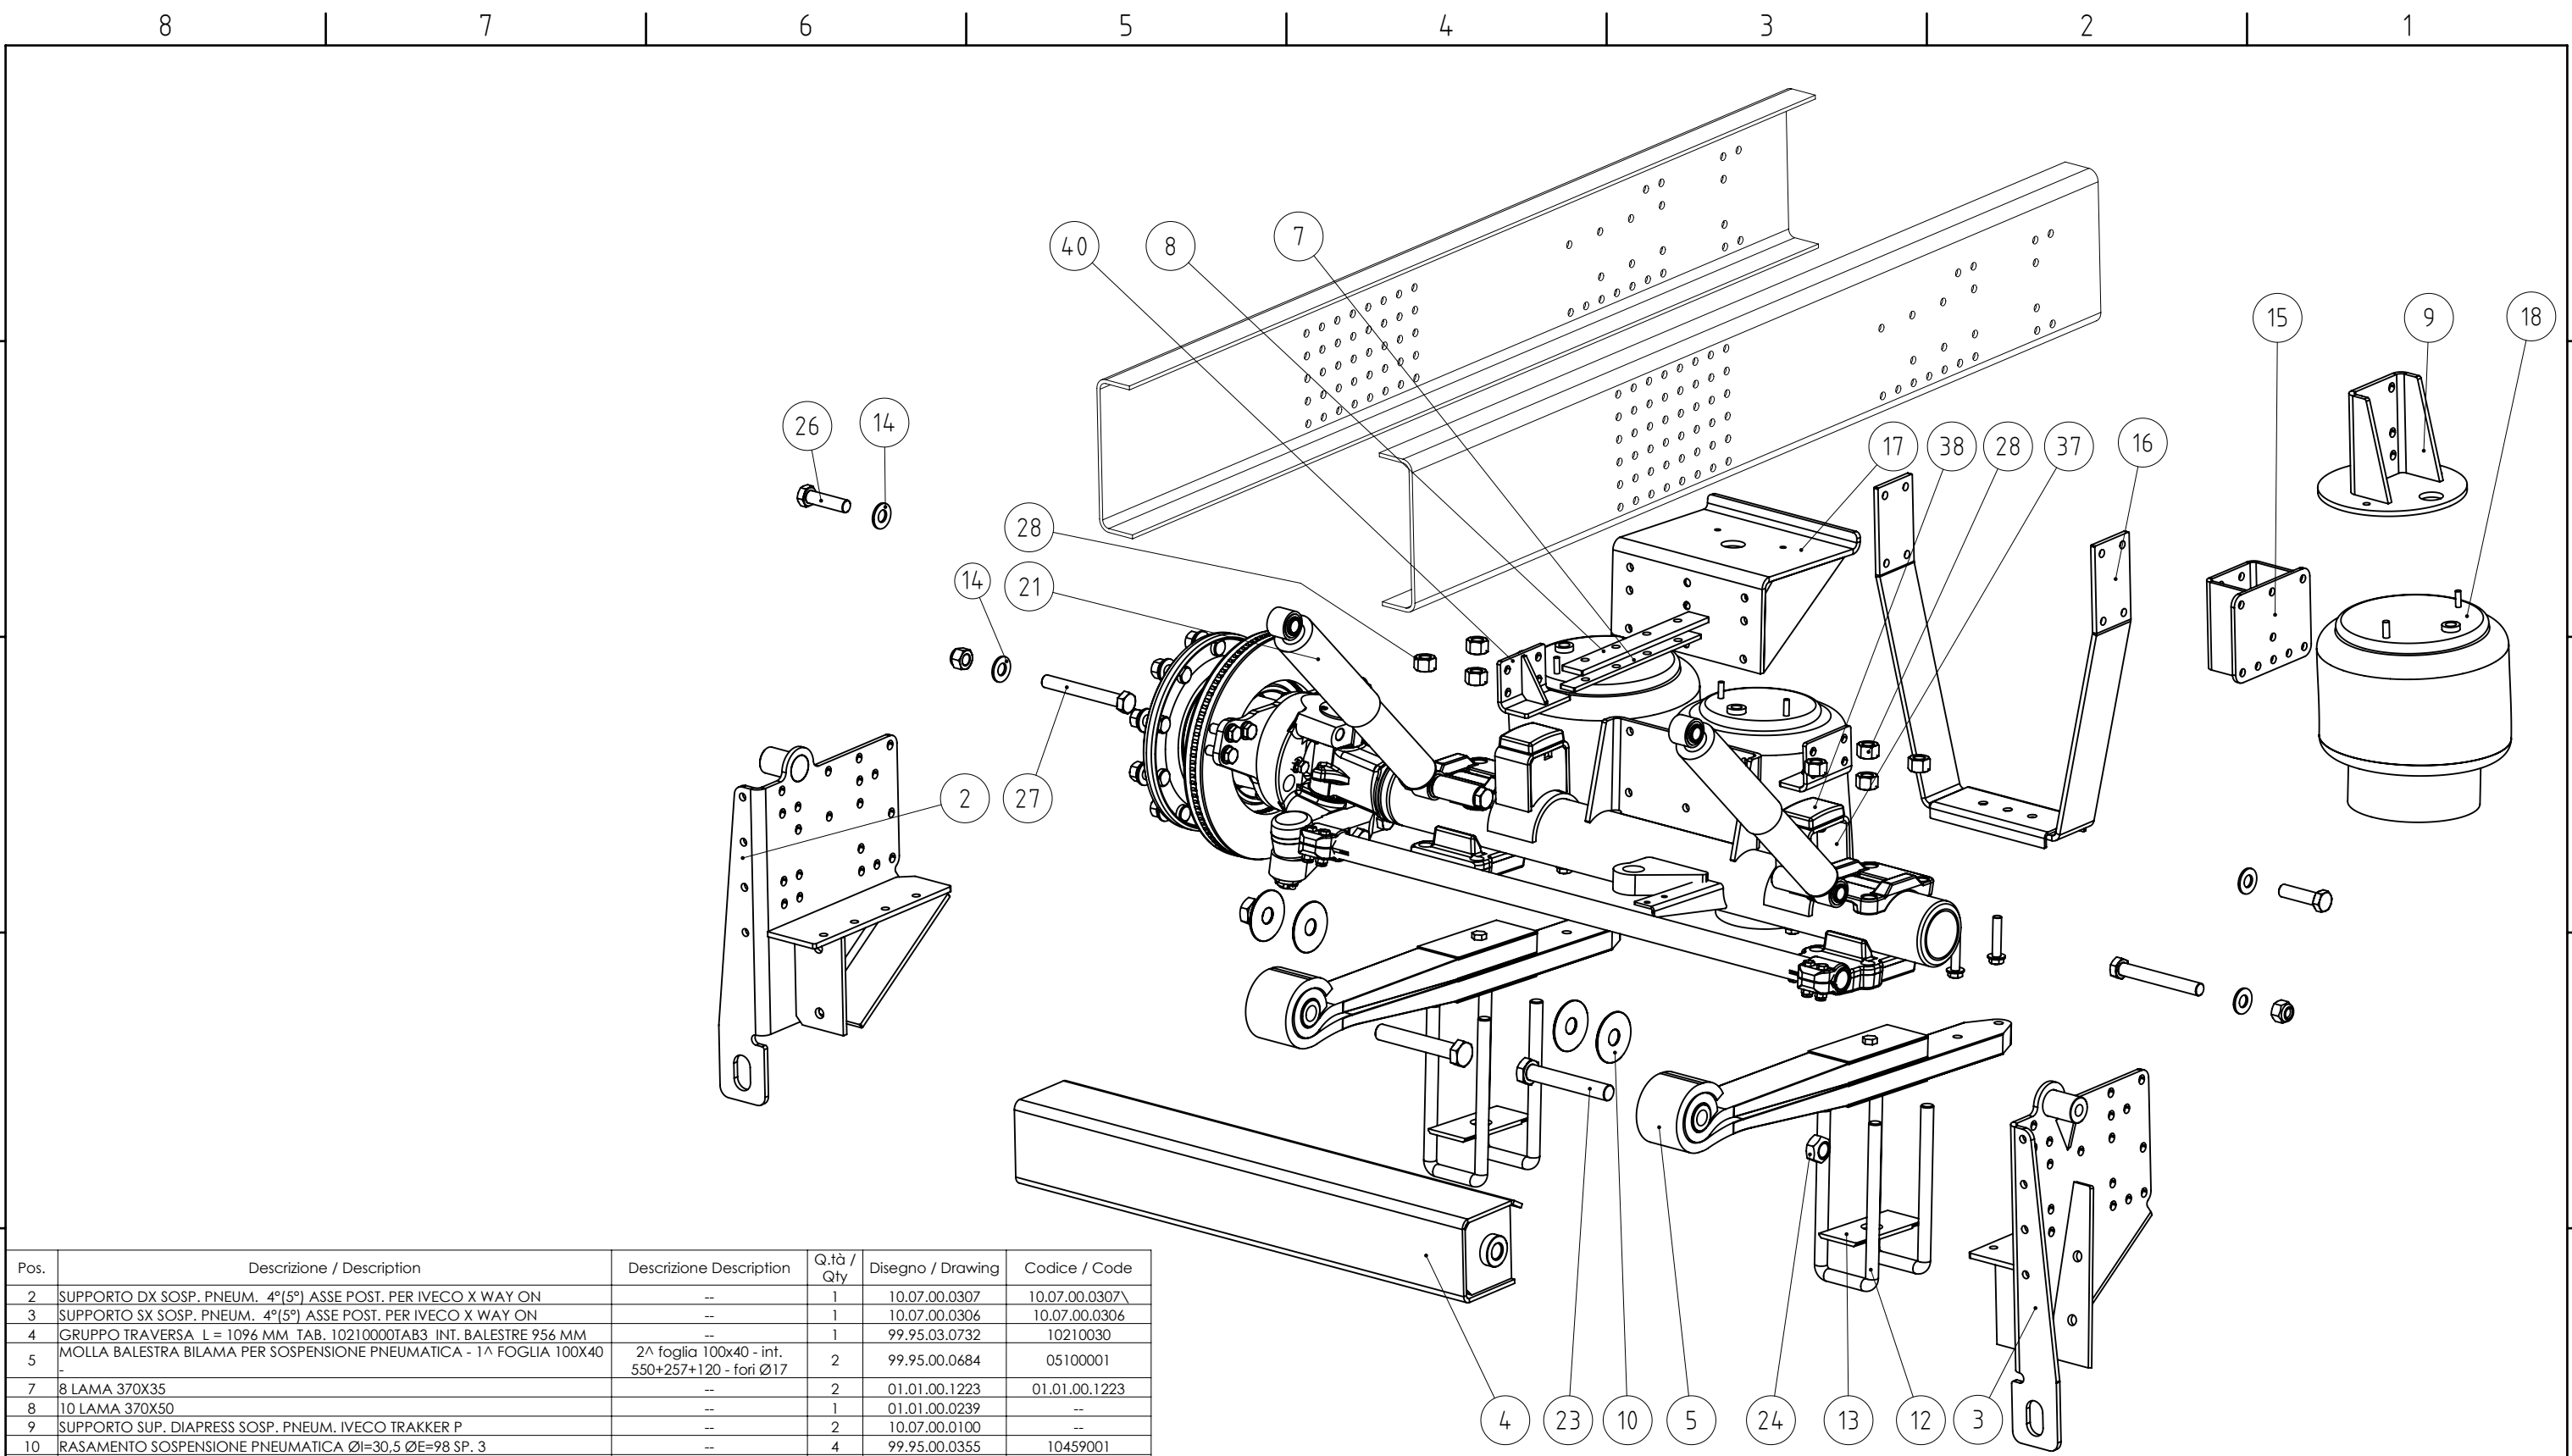

Pos.	Descrizione / Description	Descrizione Description	Q.tà / Qty	Disegno / Drawing	Codice / Code
2	SUPPORTO DX SOSP. PNEUM. 4°(5°) ASSE POST. PER IVECO X WAY ON	--	1	10.07.00.0307	10.07.00.0307\
3	SUPPORTO SX SOSP. PNEUM. 4°(5°) ASSE POST. PER IVECO X WAY ON	--	1	10.07.00.0306	10.07.00.0306
4	GRUPPO TRAVERSA L = 1096 MM TAB. 10210000TAB3 INT. BALESTRE 956 MM	--	1	99.95.03.0732	10210030
5	MOLLA BALESTRA BILAMA PER SOSPENSIONE PNEUMATICA - 1^ FOGLIA 100X40	2^ foglia 100x40 - int. 550+257+120 - fori Ø17	2	99.95.00.0684	05100001
7	8 LAMA 370X35	--	2	01.01.00.1223	01.01.00.1223
8	10 LAMA 370X50	--	1	01.01.00.0239	--
9	SUPPORTO SUP. DIAPRESS SOSP. PNEUM. IVECO TRAKKER P	--	2	10.07.00.0100	--
10	RASAMENTO SOSPENSIONE PNEUMATICA ØI=30,5 ØE=98 SP. 3	--	4	99.95.00.0355	10459001
11	Piastra di regolazione allineamento assale (sospensione pneumatica)	--	2	99.95.03.0772	10459050
12	STAFFA BALESTRA M24X2 X 101 X 310	--	4	99.95.03.0793	10500010
13	LAMA 90x200x8 PER SUPP. INF. DIAPRESS E APPOGGIO CAVALLOTTI	--	2	99.95.03.0154	10300029
14	RONDELLA FE UNI 6592 ZINC. DI=24	USO GENERALE	4	99.95.06.0999	203000240000
15	SUPPORTO PER SOLLEVATORE - INTERNO TELAIO PER IVECO	--	2	10.23.10.0016	--
16	GRUPPO ASSEMBLATO CULLA SOLLEVATORE - ASSE POST. SU IVECO TRAKKER P	--	1	10.23.10.0017	--
17	COPERCHIO MOLLA SOLLEVATORE	--	1	99.95.04.0330	10940079
21	Ammortizzatore per sosp. pneum. 7762 - 890433	--	2	99.95.00.0750	05102005
23	VITE TE 8.8 M30X3.5X190 PER BALESTRA SOSPENSIONE PNEUMATICA	--	2	99.95.05.0472	10500151
24	DADO AB M 30 X 3,5 CL. 8.8 (PER VITE BALESTRA SOSPENSIONE PNEUMATICA)	--	2	99.95.05.0040	10500101
25	Vite TE Flangiata DIN 6921 M 14 x 1,5 x 45 -10.9 - Dacromet	--	104	99.95.03.0023	061400140045
26	VITE TE 8.8 5738 24 X 2 X 90 ZINC	--	2	99.95.05.0476	222000240090
27	VITE TE 8.8 5737 ZINC. 24X190	--	3	99.95.05.0559	220000240190
28	DADO STAFFA BALESTRA M 24 X 2 CL. 10	--	8	99.95.05.0021	10500051
31	DADO AUTOBLOCCANTE CL.8 UNI 7473 DIN982 M24 X 2	--	3	99.95.04.0964	52000240000
37	SUPPORTO TAMP. FINECORS A SALDARE SU ASSALE PER SOSP. 10.01.00.0015	--	2	50.50.05.0045	50.50.05.0045
38	TAMPONE IN GOMMA PER FINECORS A SOSPENSIONE - 9066419	--	2	10.21.00.0059	10.21.00.0059
39	DADO AUTOBL. CL10 (8G) UNI 7473 - M 10	--	4	99.95.10.0999	50100100000
40	RINFORZO LONGHERONE IVECO PER APPL. TAMPONE DI FINECORS A	--	2	50.50.00.0244	50.50.00.0244
41	ASSALE STERZANTE 10 TON	--	1	50.50.00.0245	S08C101625

Material		Heat treatment		Surface finishing		Mass (kg)	
		--		--		928,82	
Tightening tolerance - I004		ISO 2768 - ---- Tolerancing ISO 8015		Author P.MARTINI	Date 31/01/2019	Scale 1:10	
 S.T. System Truck S.p.A. via Paesa, 28 - I 46048 Roverbella (MN) tel. +39 0376 696809 www.stsystemtruck.com		All proprietary rights reserved by S.T. System Truck S.p.A. The reproduction, distribution and utilisation of this document as well as the communication of its content to others without express authorisation is prohibited (see ISO 16016:2016)		Description SOSPENSIONE POST. PNEUM. PER ASSE STERZ. - IVECO X WAY 6X4 8X4 8X4/P VERSIONI ON ON+ OFF - 9 0 10 TON			
				Code 10.01.00.0049	Drawing 10.01.00.0049	Sheet 2/2	Format A3

A